


MINISPLIT SYSTEMS

High Wall On/Off

EACC-EAHC 09 to 24 FS-R

A complete range from 2,6 kW to 6,2 kW

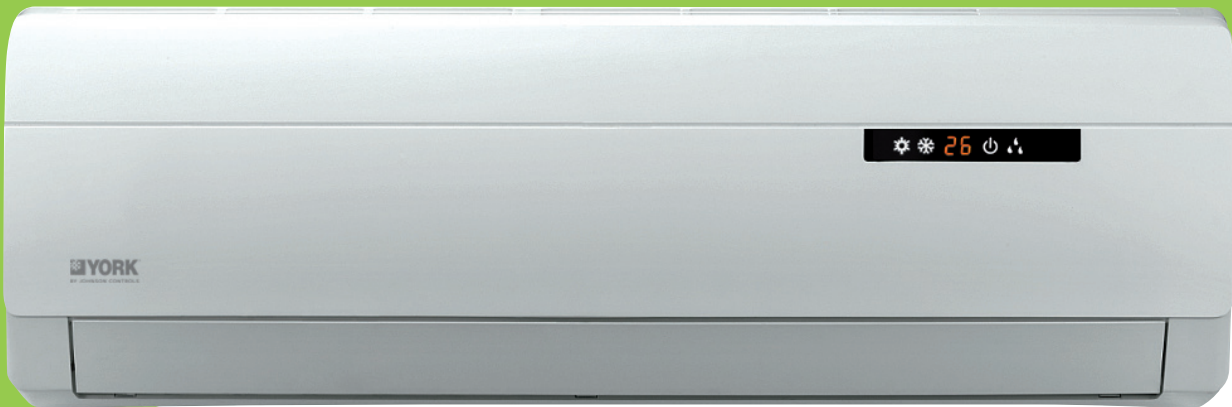


Features

- Low noise levels
- Class A
- Active carbon electrostatic filter
- Automatic restart
- ON/OFF timer
- Automatic air sweep
- Service valve protection cover
- Rustproof casing
- **Blue fin protection (indoor and outdoor units)**




Remote controller

- Wireless
- 5 operation modes (Cool/Heat/Auto/Dry/Fan)
- Sleep mode
- Room temperature setting
- Fan speed selection
- Timer setting function
- Air flow direction setting
- LCD display



High Wall On/Off

EACC-EAHC 09 to 24 FS-R

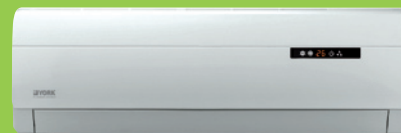

Technical features

Set reference		EACC / EAHC FS-R				
Indoor unit	Sizes	EAEC / EAKC 09	EAEC / EAKC 12	EAEC / EAKC 18	EAEC / EAKC 24	
Outdoor unit	Sizes	EADC / EAJC 09	EADC / EAJC 12	EADC / EAJC 18	EADC / EAJC 24	
Cooling capacity	kW	2,6	3,2	4,7	6,2	
Heating capacity	kW	2,8	3,5	4,9	6,5	
Compressor	Type	Rotary				
Refrigerant		R410A				
Power supply	V/Ph/Hz	230 / 1 / 50 + E				
Power input	cooling	kW	0,82	1,00	1,46	1,90
	heating	kW	0,77	0,97	1,43	1,90
EER		3,21	3,22	3,22	3,24	
COP		3,61	3,61	3,43	3,42	
Energy Class	cooling	A	A	A	A	
	heating	A	A	B	B	
Indoor airflow (high speed)	m³/h	400	400	750	780	
Sound pressure at 1 m	Indoor (L/M/H)	dB(A)	32 / 35 / 37	32 / 35 / 38	37 / 41 / 45	38 / 41 / 45
	Outdoor	dB(A)	50	52	55	56
Dimensions	Indoor	H (mm)	255	265	298	298
		W (mm)	730	790	940	940
		D (mm)	174	170	200	200
	Outdoor	H (mm)	540	540	540	680
		W (mm)	785	798	848	913
		D (mm)	355	355	360	428
Net weight	Indoor unit	kg	8	9	13	13
	Outdoor unit	kg	31	35	40	46
Piping	Type of connection		Flare			
	Diameter	Gas	3/8"	1/2"	1/2"	1/2"
		Liquid	1/4"	1/4"	1/4"	1/4"
Refrigerant charge	g	760	840	1 150	1 450	
Pipe run	Length	m	15	20	25	25
	Height	m	5	10	10	10
Operating limit - cooling mode	min./max.	+18°C / +46°C				
Operating limit - heating mode	min./max.	-7°C / +24°C				

Nominal cooling capacity based on : - Indoor Air Temp. 27°C DB / 19°C WB - Outdoor Air Temp. 35°C DB

Nominal heating capacity based on : - Indoor Air Temp. 21°C DB - Outdoor Air Temp. 7°C DB/6°C WB

Piping length : 5 m with initial charge

Codes / Options / Accessories

Sizes		09	12	18	24
Condensate pump	A			AMP01C	
Wall mounting kit	A		AMW42A		AMW50A
Floor mounting kit	A			AMF44B	

A -accessory (supplied loose)

